


TUBE-LITE

Suspended tubular lighting system with 360° light distribution

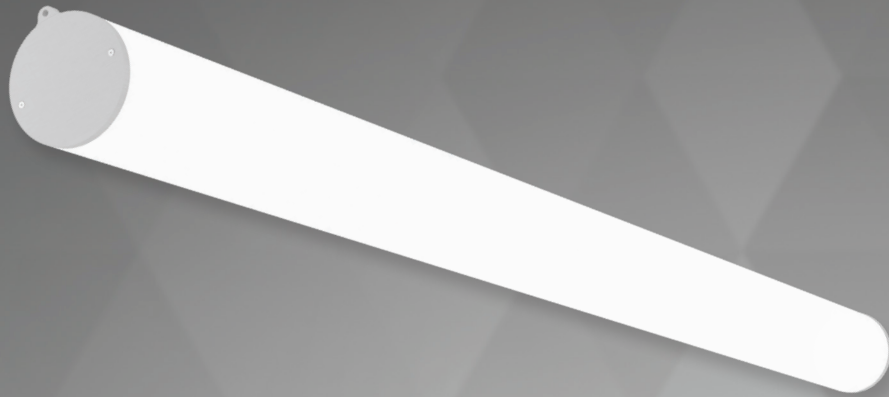

FEATURES

- Horizontal and vertical suspended versions available
- Supplied complete with 1.25m suspension kit as standard
- Special order RAL options available
- IP40 as standard with an IP65 option

OPTIONS

• 3000K LED	3000
• 4000K LED	4000
• DALI	D
• RAL9005 black end-caps	BL
• RAL 9006 aluminium end-caps	AL
• RAL 9016 white end-caps	WH
• RAL XXXX	RAL
• IP65 Protection	IP

ORDERING

Ref	Orientation	Luminaire power (W)	Luminaire Output (lm)	Dimensions (mm)
TUBH53	Horizontal	53	5100	900 x 120
TUBH80	Horizontal	80	8450	1435 x 120
TUBH122	Horizontal	122	11800	2000 x 120
TUBV53	Vertical	53	5100	900 x 120
TUBV80	Vertical	80	8450	1435 x 120
TUBV122	Vertical	122	11800	2000 x 120